


Forescout 6100 Series

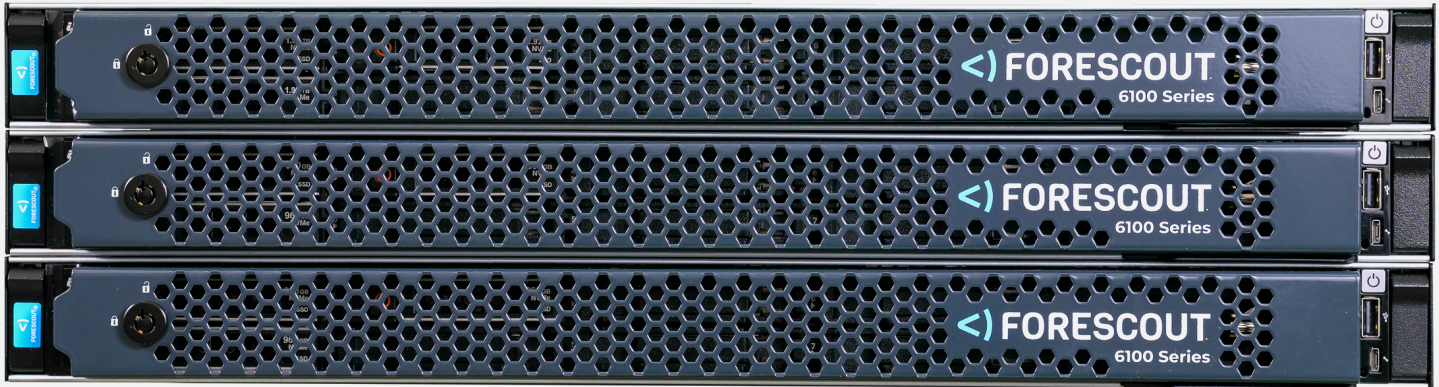

Overview

The Forescout 6100 series hardware appliances are designed to meet the continued increase in interconnected network environments and assets, helping businesses stay competitive and secure. These appliances offer innovations that improve performance and efficiency.

- Higher processing power, RAM, and storage
- Non-volatile Memory Express (NVMe)
- Optimizes energy usage and operational costs
- Increase endpoint density to reduce rack space requirements

These new appliances host the Forescout Platform and solutions, driving the next generation of sophisticated network security solutions for IT infrastructure and smart IOT/OT solutions and medical devices.


Customer Environments

The Forescout 6100 series of appliances ships with Forescout for Network Security eyeSight 9.x or with eyeInspect Sensors 5.5. Customers refreshing or expanding their Forescout 5100 series hardware environments with 6100 series appliances must first upgrade their deployment to Forescout eyeSight 9.x.


Hardware Specifications

Hardware Specifications	6120/6140/6160
Form Factor	1U 19" Rack Mount
CPU	6120 – 1x Intel 4410Y 12C/24T 6140 – 2x Intel 4410Y 24C/48T 6160 – 2x Intel 5418Y 48C/96T
Memory	6120 – 64GB 6140 – 128GB 6160 – 128GB
Storage	NVMe (RAID-1+HS) 6120/6140 – 3x 960GB 6160 – 3x 1.92TB
Fiber Network Interfaces	4x 10/25Gbps (2x 10/25Gbps dual rate SR fiber SFPs included in base config)
Copper Network Interfaces	4x 10/100/1000 Mbps
USB Ports	Front Ports: 1x iDRAC Direct (Micro-AB USB) port, 1x USB 2.0 Rear Ports: 1x Dedicated iDRAC Ethernet port, 1x USB 2.0, 1x USB 3.0
I/O Support	1 serial port (DB9)
Video (VGA) (no DVD-ROM)	1 (DB15)
Power Supply	2x 1100 W Titanium 100–240 VAC or 240 HVDC
Power Consumption (max)	1050W 100-120V 1100W 200-240V
Operating Temperature	10-35°C (50-95°F)
Storage Temperature	-40 to 65°C (-104 to 149°F)
Heat Dissipation (max)	4125 BTU/hr
Humidity	Operating (8% to 80%)
Appliance Dimensions (LxWxH)	71.27 cm x 48.2 cm x 4.82 cm (28.06" x 18.97" x 1.68")
Shipment Package Dimensions (LxWxH)	92.27 cm x 59.38 cm x 27.00 cm (36.33" X 23.38" X 10.63") 59.5 lbs

6100 series with bezel

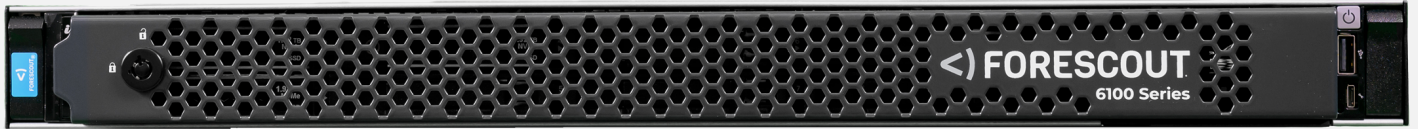

6100 series without bezel

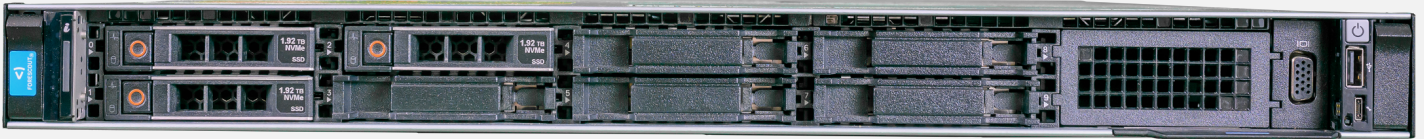

Back of 6120: the I350 NIC is in Slot 1 for 6120



Back of 6140 and 6160



What's Included



Fore Scout 6100 Series appliance



Power Cord(s)



Enterprise Products Safety, Environmental, and Regulatory Information



Front Bezel Rail Kits (mounting brackets)



DB9 Console connecting cable



Fore Scout Technologies, Inc.
Toll-Free (US) 1-866-377-8771
Tel (Intl) +1-408-213-3191
Support +1-708-237-6591
Learn more at [Fore Scout.com](https://www.forescout.com)

©2025 Fore Scout Technologies, Inc. All rights reserved. Fore Scout Technologies, Inc. is a Delaware corporation. A list of our trademarks and patents can be found at <https://www.forescout.com/company/legal/intellectual-property-patents-trademarks>. Other brands, products, or service names may be trademarks or service marks of their respective owners. 01_07